

G 1.22R - G 1.22 - G 2.22R MAXI - G 2.22 MAXI

Light-oil burners at two steps pressure.

They are composed by: aluminium frame, protection cover with noise reduction plate, combustion head with micrometric adjustment, high flame stability.

Compact overall dimensions and disposition rationalized of the components with accessibility facilitated for the operations of setting and maintenance.

In the versions R preheater with control of temperature for soft and sicure ignitions also at low temperatures.

Complete of connector 7 poles, flange and gasket for installation on boiler, nozzle, flexible pipes, line filter.



Fig. 1 G 1.22R - G 1.22



Fig. 2 G 2.22R MAXI - G 2.22 MAXI

TECHNICAL DATA G 1.22R - G 1.22 - G 2.22R MAXI - G 2.22 MAXI

MODEL		G 1.22R	G 1.22	G 2.22R MAXI	G 2.22 MAXI
Flow min. 1st st. / min. 2nd st. - max. 2nd st. *	[kg/h]	1.4/2.0-5.0		2.2/4-9.8	
Thermal power min. 1st st. / min. 2nd st. - max. 2nd st. *	[Mcal/h]	14.3/20.4-51		22.4/40.8-99.9	
Thermal power min. 1st st. / min. 2nd st. - max. 2nd st. *	[kW]	16.6/23.7-59.2		26/47.3-116	
Fuel: LIGHT-OIL 1.5°E at 20°C = 6.2 cSt = 35 sec Redwood N°1					
Intermittent working operation (min. 1 stop every 24 hours) two steps pressure					
Environmental conditions operation / storage:	-15...+40°C / -20...+70°C, rel. humidity max. 80%				
Max. temperature combustion air	[°C]	60			
Nominal electric power	[W]	220	130	250	140
Fan motor	[W]	100	100	100	100
Nominal current absorption	[A]	1	0.6	1.1	0.7
Pre-heater	[W]	30-110	-	30-110	-
Power supply:	1N~230V - 50Hz				
Electric protection degree:	IP 40				
Noisiness min. - max. **	[dBA]	57-59	57-59	59-61	59-61
Burner weight ***	[kg]	10	10	10	10

* Reference conditions: Environment temperature 20°C - Barometric pressure 1013 mbars - Altitude 0 metre (sea level).

** Measured sonorous pressure in the combustion laboratory, with burner on operation on beta boiler to 1m of distance (UNI EN ISO 3746).

*** For burner with iron cover (F) add 2 kg to the weight.

OPERATING RANGE DIAGRAM G 1.22R - G 1.22 - G 2.22R MAXI - G 2.22 MAXI

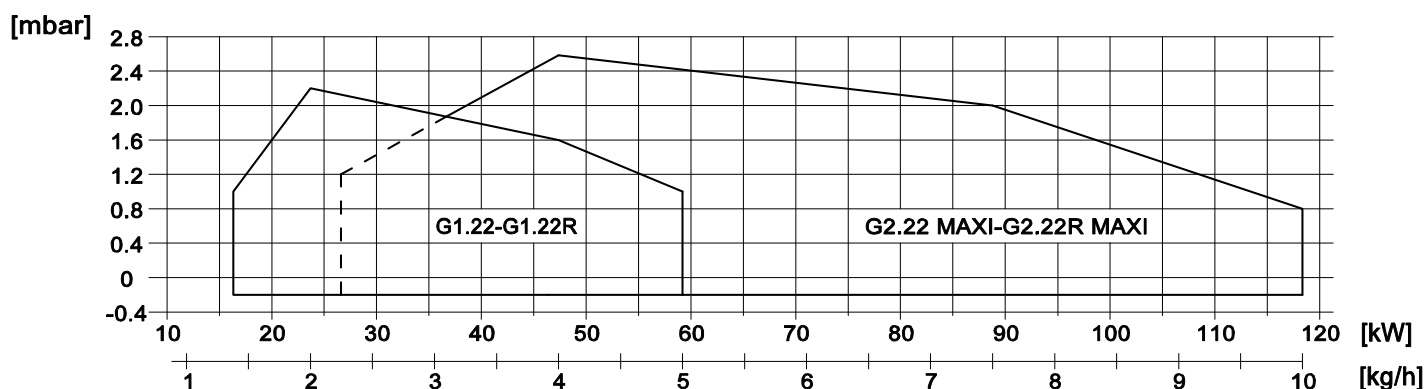
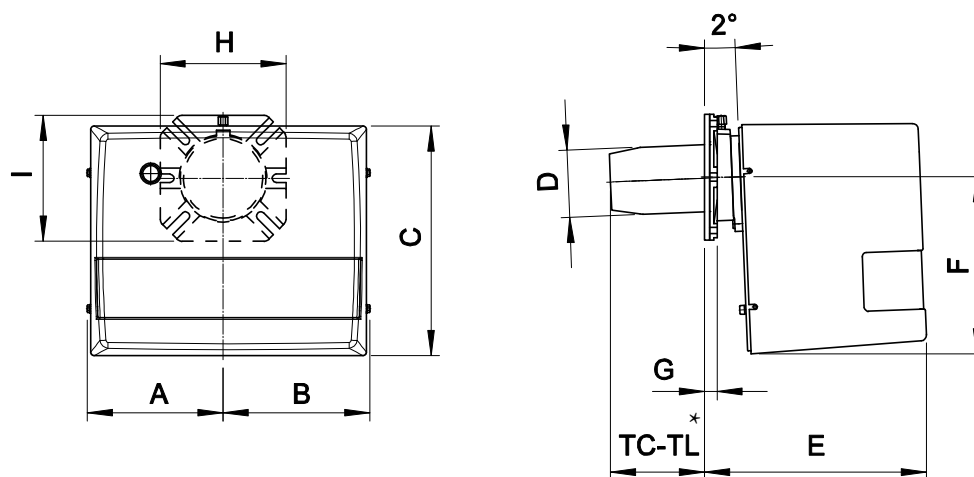


Fig. 3 X = Thermal power Y = Pression in the combustion chamber

The firing rates has been obtained based on test boilers in accordance with EN267 standards and are indicative of matching the burner to the boiler. For the correct operation of the burner, combustion chamber dimensions must be in accordance with current regulation. In case of non-compliance, contact the manufacturer.


**FBR****DIMENSIONS [MM]****LIGHT-OIL BURNERS AT TWO STEPS PRESSURE**

SK070045_A_en

**Fig. 4** Dimensions G 1.22R - G 1.22 - G 2.22R MAXI - G 2.22 MAXI

MODEL	A	B	C	D	E	F	G	H	I
G 1.22 - G 1.22R	157	170	275	80	265	210	15	150	150
G 2.22 MAXI - G 2.22R MAXI	157	170	275	90	265	210	15	150	150

* See "flame tube length"

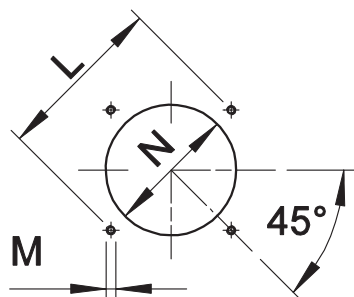BOILER PLATE

** Suggested dimension of connection between burner and generator.

Fig. 5 Boiler plate

MODEL		L min	L **	L max	M	N min	N **	N max
G 1.22 - G 1.22R	mm	130	150	170	M8	90	110	130
G 2.22 MAXI - G 2.22R MAXI	mm	130	150	170	M8	100	110	130

FLAME TUBE LENGTH

Flame tube length must be selected based on the specifications supplied by boiler manufacturer and, in any case, it must be greater than the thickness of the boiler door included its insulation.

In case of boilers with flame inversion or front flue combustion chambers, it is necessary to insulate the area between the flame tube and front door with refractory material. This protection material must not impede flame tube extraction.

MODEL		TC	TL ***
G 1.22 - G 1.22R	mm	112	152
G 2.22 MAXI - G 2.22R MAXI	mm	107	147

*** For different flame lengths, please contact our Technical-Sales Department.



FBR

PRODUCT SPECIFICATION

LIGHT-OIL BURNERS AT TWO STEPS PRESSURE

SK070045_A_en

SHORT DESCRIPTION

Light-oil burners at two steps pressure.

DETAILED SPECIFICATION

Light-oil burners at two steps pressure, composed by:

- Aluminium frame;
- Combustion head with micrometric adjustment, high flame stability and low emissions;
- Protection cover with noise reduction plate;
- Flange and insulating gasket for fixing at boiler;
- Single-phase power supply;
- Photoresistance for flame detection;
- IP 40 electric protection level;
- Hydraulic system of regulation combustive air on the two stages of flame.

CONFORMING TO:

- CE rules;
- 2014/30/UE Directive E.M.C.;
- 2014/35/UE Directive L.V.;
- 2014/68/EU Directive M.D.;
- 97/23/CE Directive P.E.D.;
- Reference rules: EN267 (liquid fuel) - EN746-2 (industrial thermoprocessing equipment).

STANDARD EQUIPMENT

- 7-poles plug for the electrical connections;
- Flexible hoses for connection;
- Line filter;
- Isomart gasket;
- Nozzle;
- Flange with insulating gasket;
- Burner nameplate;
- Warranty;
- Instruction handbook for installation, use and maintenance.

Distributed by:



VENTA-ENERGY, LLP
01001, Bolshaya Vasilkovskaya
st., 145/1, Kiev, Ukraine.
www.unical.com.ua
sale@unical.com.ua
+38 067 575 85 95
Myhal Vladyslav